





Body: **Stainless Steel A2**  
 Stem: **Stainless Steel A2**  
 Dome head







Hülse: **Edelstahl A2**  
 Dorn: **Edelstahl A2**  
 Flachrundkopf

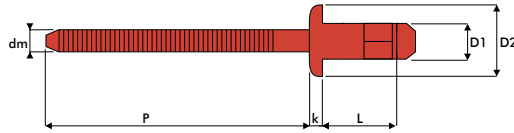

Cuerpo: **Inox A2**  
 Vástago: **Inox A2**  
 Remache alomada



D1	L	 min - max	 mm	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
<b>4.8</b>	<b>9.0</b>	1.5 - 3.5	4.9 - 5.1	9.5	2.4	3.10	30	3800	4600	<b>75XX14809</b>
	<b>11.5</b>	3.5 - 6.0						3800	5700	<b>75XX14811</b>
	<b>14.0</b>	6.0 - 8.5						3800	6100	<b>75XX14814</b>
	<b>16.5</b>	8.5 - 11.0						3800	6100	<b>75XX14816</b>
<b>6.4</b>	<b>9.0</b>	1.5 - 3.5	6.5 - 6.7	12.8	2.9	4.17	32	7500	12500	<b>75XX16409</b>
	<b>10.5</b>	2.8 - 4.8						7500	12500	<b>75XX16410</b>
	<b>11.5</b>	3.35 - 5.35						7500	12500	<b>75XX16411</b>
	<b>12.5</b>	4.8 - 6.8						7500	12500	<b>75XX16412</b>
	<b>14.5</b>	6.8 - 8.8						7500	14000	<b>75XX16414</b>
	<b>15.5</b>	7.5 - 9.5						7500	15000	<b>75XX16415</b>
	<b>16.5</b>	8.8 - 10.8						7500	15000	<b>75XX16416</b>
	<b>17.5</b>	9.8 - 11.8						7500	15000	<b>75XX16417</b>
	<b>18.5</b>	10.8 - 12.8						7500	16000	<b>75XX16418</b>
	<b>19.5</b>	11.8 - 13.8						7500	16000	<b>75XX16419</b>
<b>20.5</b>	12.8 - 14.8						7500	16000	<b>75XX16420</b>	