

Q-MULTIGRIP STANDARD





Body: **Aluminium**
Stem: **Steel**
Countersunk head







Hülse: **Aluminium**
Dorn: **Stahl**
Senkkopf

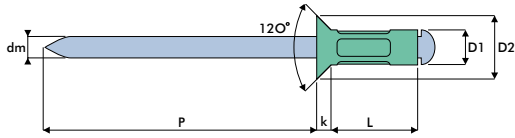

Cuerpo: **Aluminio**
Vástago: **Acero**
Remache avellanada



D1	L	 min - max	 mm	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	8.0	1.5 - 5.0	3.3 - 3.4	6.0	1.0	1.75	26	910	680	15AS43208
	10.0	2.4 - 6.3								15AS43210
	12.0	4.0 - 7.9								15AS43212
	14.0	5.5 - 9.5								15AS43214
	16.0	8.5 - 12.5								15AS43216
4.0	8.0	1.6 - 4.5	4.1 - 4.2	7.5	1.3	2.15	27	1330	1000	15AS44008
	10.0	2.8 - 6.5								15AS44010
	12.0	2.8 - 7.9								15AS44012
	14.0	3.0 - 8.5								15AS44014
	16.0	4.3 - 9.5								15AS44016
	18.0	9.5 - 14.0								15AS44018
	20.0	11.5 - 16.0								15AS44020
4.8	10.0	1.6 - 5.0	4.9 - 5.0	9.0	1.5	2.63	28	2350	1500	15AS44810
	12.0	3.2 - 7.9								15AS44812
	14.0	4.0 - 9.0								15AS44814
	16.0	6.0 - 11.0								15AS44816
	18.0	6.4 - 12.7								15AS44818
	20.0	10.0 - 15.0								15AS44820
	22.0	12.0 - 17.0								15AS44822
	25.0	14.0 - 19.0								15AS44825
	27.0	17.0 - 22.0								15AS44827
	30.0	20.0 - 25.0								15AS44830