





Body: **Steel**
Stem: **Steel**
Dome head







Hülse: **Stahl**
Dorn: **Stahl**
Flachrundkopf

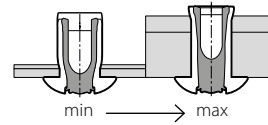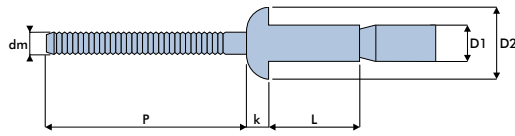

Cuerpo: **Acero**
Vástago: **Acero**
Remache alomada



D	L	 min - max		dk	k	dm	p			code
	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
4.8	10.0	1.6 - 6.9	4.9 - 5.1	9.5	2.1	3.1	27	5100	6400	60SS14810
	14.0	1.6 - 11.1								60SS14814
6.4	14.0	2.0 - 9.5	6.6 - 6.9	12.7	2.9	4.1	28	10400	11700	60SS16414
	19.0	2.0 - 15.9								60SS16419





Body: **Steel**
Stem: **Steel**
Countersunk head







Hülse: **Stahl**
Dorn: **Stahl**
Senkkopf

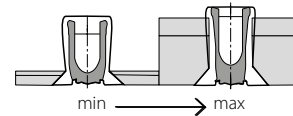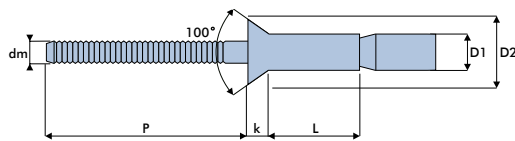

Cuerpo: **Acero**
Vástago: **Acero**
Remache avellanada



D	L	 min - max		dk	k	dm	p			code
	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
4.8	12.0	3.2 - 8.4	4.9 - 5.1	8.6	2.2	3.1	27	5100	6400	60SS44812
	16.0	3.2 - 12.2								60SS44816
6.4	16.0	3.2 - 12.0	6.6 - 6.9	10.2	2.4	4.1	28	10400	11700	60SS46416