





Body: **Steel**
Stem: **Steel**
Dome head



Hülse: **Stahl**
Dorn: **Stahl**
Flachrundkopf



Cuerpo: **Acero**
Vástago: **Acero**
Remache alomada

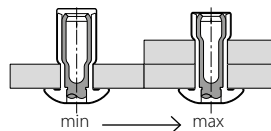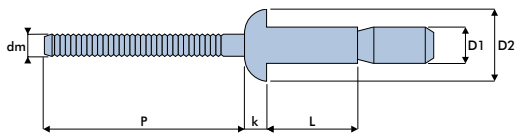

D	L	min - max		dk	k	dm	p	[N]	[N]	code
	mm	mm	mm	mm	max. mm	ref. mm	min. mm			
4.8	10.0	1.6 - 6.4	4.9 - 5.1	9.5	2.2	3.1	27	4400	5700	65SS14810
	14.0	1.6 - 11.1								65SS14814
6.4	14.0	2.0 - 9.5	6.6 - 6.9	12.7	3.0	4.1	28	8200	11100	65SS16414
	20.0	2.0 - 15.9								65SS16420





Body: **Steel**
Stem: **Steel**
Countersunk head



Hülse: **Stahl**
Dorn: **Stahl**
Senkkopf



Cuerpo: **Acero**
Vástago: **Acero**
Remache avellanada

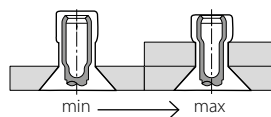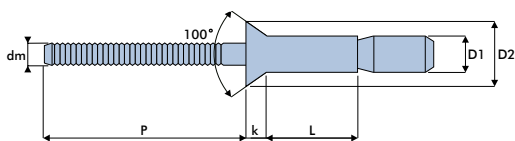

D	L	min - max		dk	k	dm	p	[N]	[N]	code
	mm	mm	mm	mm	max. mm	ref. mm	min. mm			
4.8	12.0	3.6 - 7.9	4.9 - 5.1	8.8	1.8	3.1	27	4400	5700	65SS44812
	16.0	3.6 - 12.7								65SS44816
6.4	16.0	5.0 - 11.1	6.6 - 6.9	10.6	2.0	4.1	28	8200	11100	65SS46416
	22.0	5.0 - 17.5								65SS46422